Data Sheet

75KW HYDRO-LIFT Triple Submersible Pump

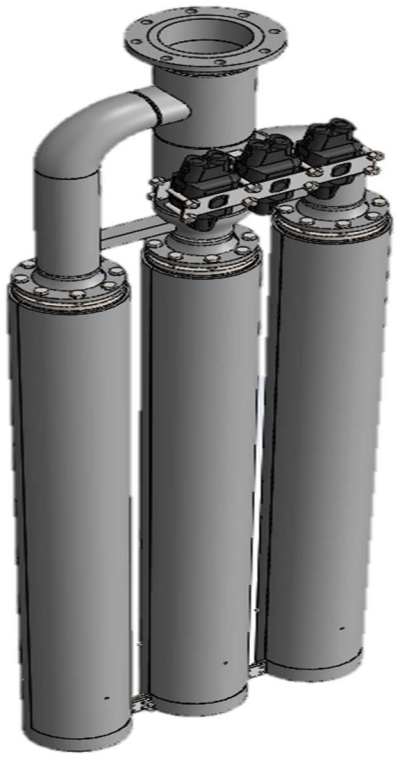

Motor Specification	
Motor Rating	3x 75kW
Shaft Speed	3505rpm
Electrical Supply	3x 3 Phase / 440V / 60Hz / 150A MRB Required
Enclosure	IP68
Construction	Bronze (G-CuSn10) / Stainless Steel 316 (1.4401)
Running Current	3x 130A
Starting Current	3x 325A to 520A (dependent on generator)
Cables	6x4C16mm²
Pump Specification	
Nominal Flow	2,249USGPM @ 149PSI (519m³/h @ 10.3BAR)
Max Flow/ Max Head	3,439USGPM (780m³/h) 185PSI (12.8BAR)
Connection Size and Type	8” ASA 150 RF Flange
Weights & Dims (Incl. Deployment Caissons)	
Height x Length x Width	495mm x 3810mm x 1005mm
Gross Weight	1800kg

Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer’s use and for ensuring that Customer’s workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. Further, nothing contained herein shall be taken as a recommendation to manufacture or use any of the herein described materials or processes in violation of existing or future patents. © 2025 OPTIMA Solutions UK Ltd. All Rights Reserved.